


TULIP EJECTOR

ES Expulsor Elástico DE Kreuzauswerfer

IT Espulsore Elastico PT Extractor Elástico FR Éjecteur Tulipe

● Cad Insertion Point

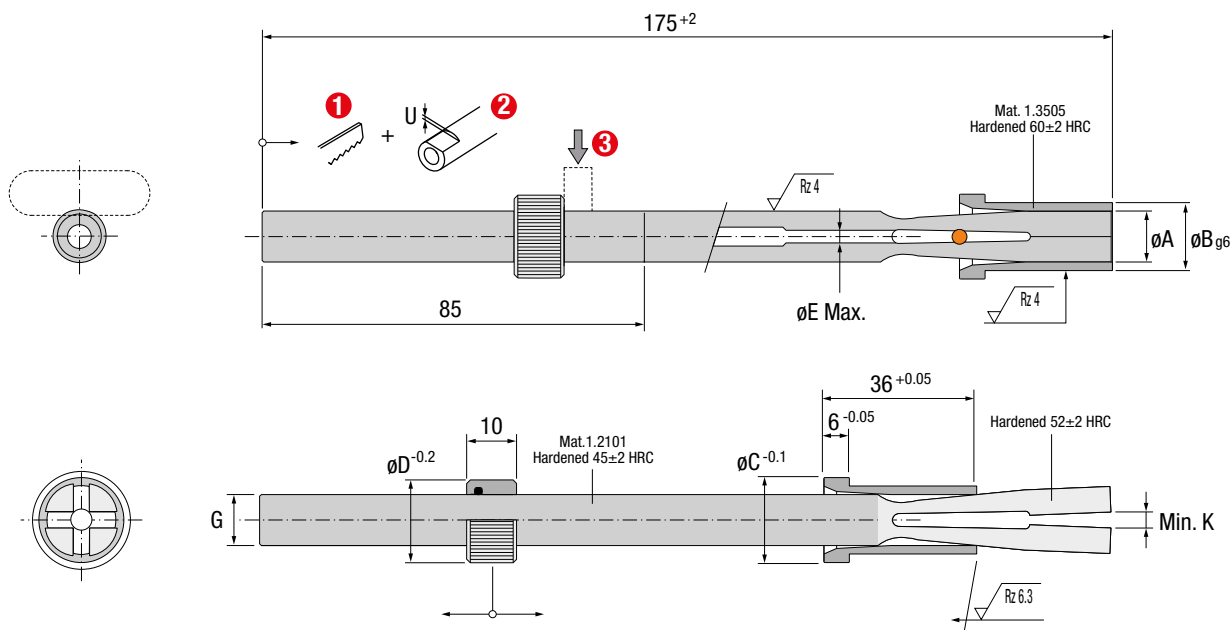

EE

Patented

Max. 150°C

IMPORTANT !

Special lengths of 250 and 325mm. upon request.
Largos especiales de 250 y 325mm. bajo demanda.
Sonderlängen von 250 und 325mm. auf Anfrage.
Lunghezza speciale 250/325mm. su richiesta.
Dimensões especiais de 250 e 325mm. quando pedido.
Longueurs spéciales de 250 et 325mm. sur demande.

Ref.	A	B	C	D	E	G	H	K	U	Balinit C®
EE.060175	6	10	12	12	-	MF 6x0.75	9	2.8	0.5	●
EE.082175	8	12	14	14	2	MF 8x0.75	11	2.8	0.5	●
EE.103175	10	14	16	16	3	MF 10x0.75	13	2.8	0.5	●
EE.124175	12	16	18	18	4	MF 12x0.75	15	3	0.5	●
EE.168175	16	20	22	22	8	MF 16x0.75	19	3	1	●

Installation Guidelines

Consejos de Instalación · Richtlinien zur Installation · Consigli di Installazione · Instruções de Instalação · Mode d'Installation

