

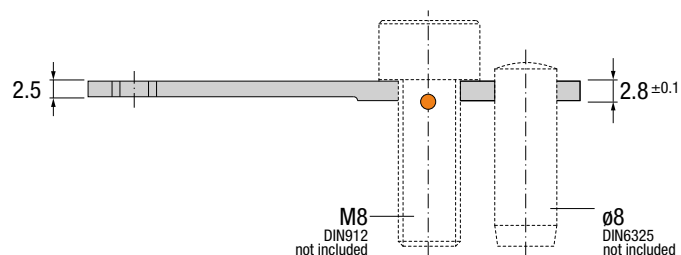


ES Retenedor Modular DE Mitnehmer Modular
IT Ritenitore Modulare PT Retensor Modular FR Retenue Modulée



RM

Max.
150°C




Ref.


RM.651608

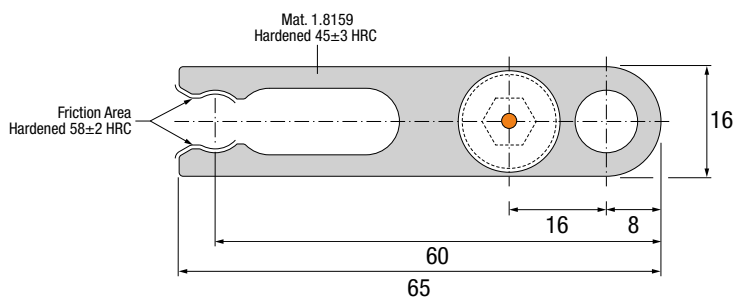


RF*1 RM=75



RF*2 RM=150



RF*3 RM=225



RF*4 RM=300

RF=Approximate resistance value that can be obtained by grouping clips.
 RF=Valor aproximado de resistencia que se puede obtener agrupando clips.
 RF=Zirkel Widerstand beim Einbau entsprechend obiger Darstellung.
 RF=Valore approssimativo di resistenza che si può ottenere raggruppando più ritensori.
 RF=Valor aproximado de resistencia que se pode obter agrupando clips.
 RF=Valeur approximative que l'on peut obtenir en assemblant les retenues.

Consejos de Instalación · Richtlinien zur Installation · Consigli di Installazione · Instruções de Instalação · Mode d'Installation

