


ES Cuña Guía - SET DE Keilführungs - SET
IT Contrasto Colonna - SET PT Guia Cunha - SET FR Guide de Chariot - SET



Max.
150°C

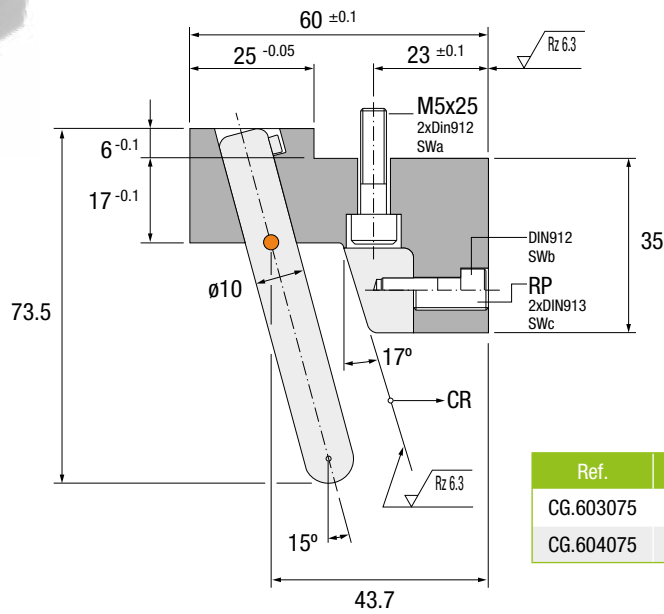

Mat. 1.2312
 $\approx 1.080 \text{ N/mm}^2$

5x5

10

5

10

10

$A \pm 0.1$

$B - 0.05$

Ref.	A	B	CR (N)	RP	SWa	SWb	SWc	Includes
CG.603075	17	30	180.000	081015	5	3	4	GI.010075
CG.604075	22	40	320.000	101015	5	4	5	GI.010075


Standard stroke of 11mm.
 Recorrido estándar de 11mm.
 Standard Hub 11mm.
 Corsa carrello 11mm.
 Curso standard 11mm.
 Course standard de 11mm.



Max.
150°C



ES Corredera Ajustada DE Vorabgestimmter Schieber
IT Carrello Aggiustato PT Corrediça Ajustada FR Coulisseau de Chariot

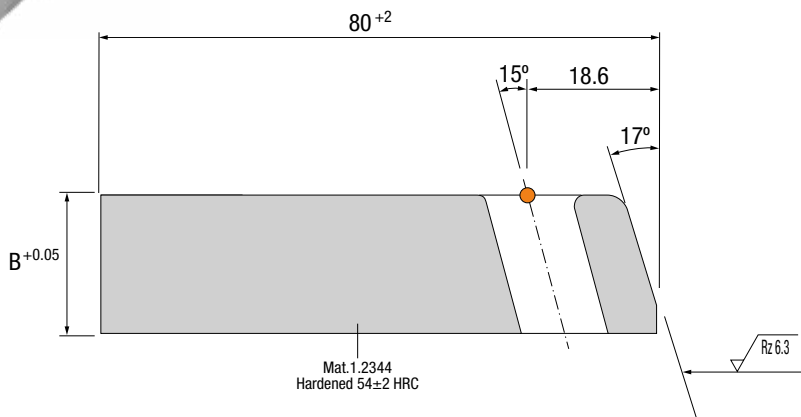

Technical drawing of a mechanical part showing surface texture specifications. The drawing includes a dimension line labeled $A^{0.02}$ indicating a length of 0.02. Surface texture symbols (Rz 6.3) are specified on three surfaces: the top surface, the left vertical surface, and the bottom surface. The part is shown in a perspective view with a grey shaded rectangular body and a smaller grey rectangular feature on the left side.

Ref.	A	B
CA.322080	32	20
CA.322480	32	24
CA.422080	42	20
CA.422480	42	24

24.5