

JY

EJECTION





Max.
150°C



EXTERNAL INVERTED DOUBLE EJECTION


ES Doble Expulsión Invertida Externa DE Externes, umgekehrtes Doppelauswerfer-System
IT Doppia Espulsione Invertita Esterna PT Dupla Extração Invertida Externa FR Double Ejection Inversée Externe

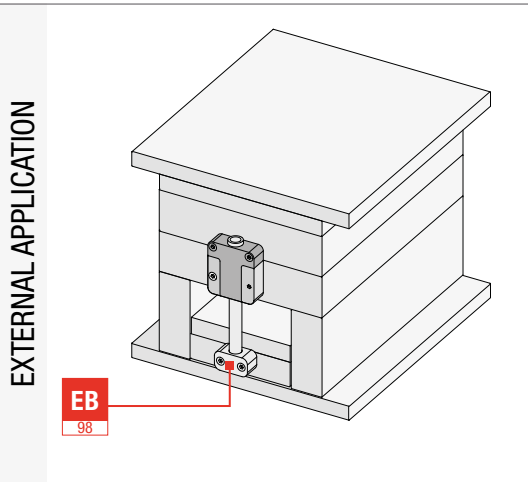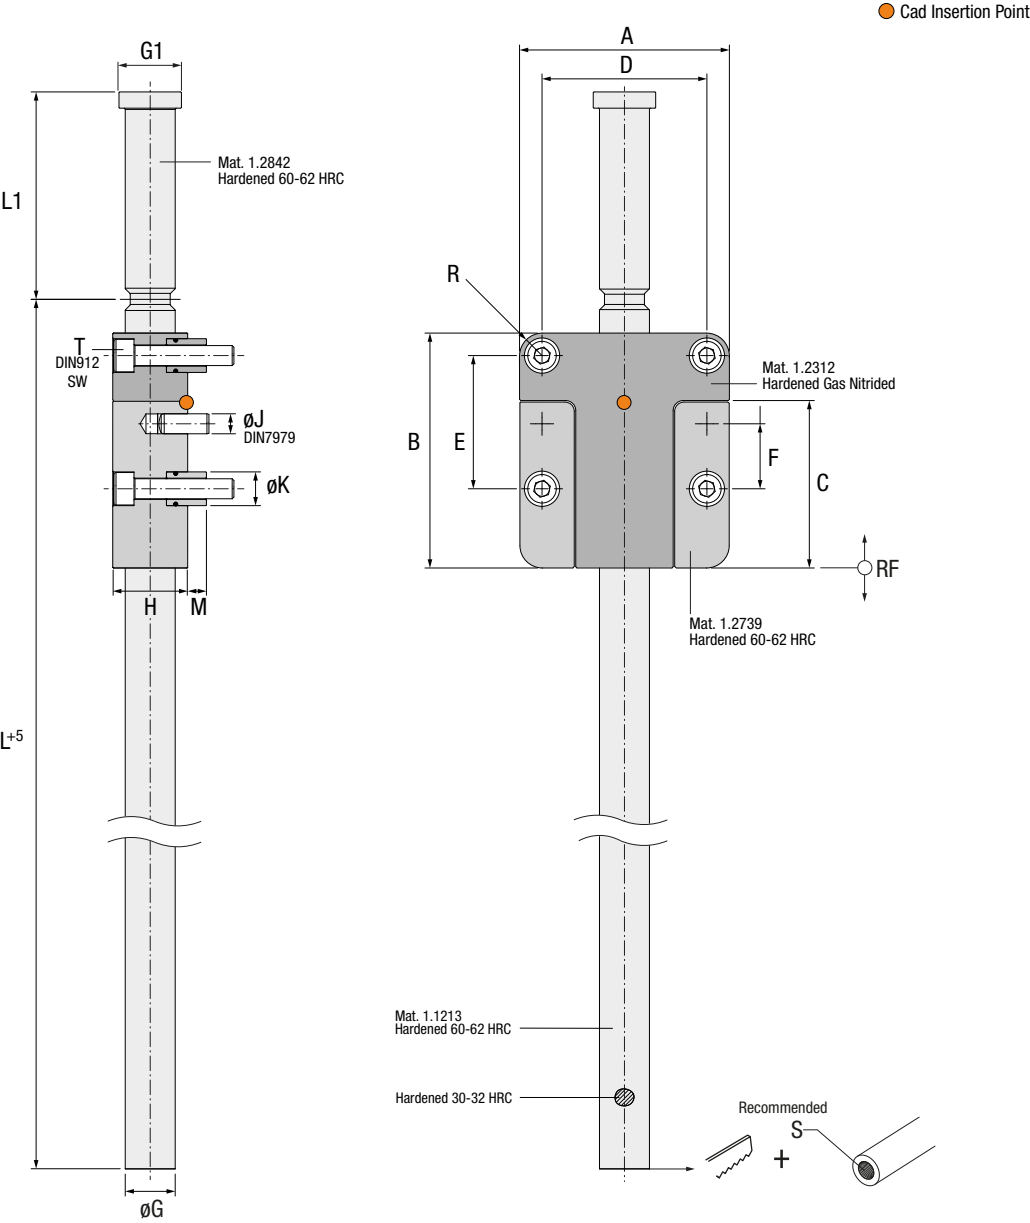


Ref.	A	B	C	D	E	F	G	G1	H	J	K	L	L1	M	R	S	T	X	Y		Min. Stroke	Max. Stroke	Max. Load (kN)	SW
JY.140600	62	70	50	48	38.2	18	14	18	22	ø6x20	10.5	348	61.9	5.5	7.2	M8	M6x30	15	13		6	30	4	5
JY.200800	84	94	67	66	53.3	26	20	25	30	ø8x20	13.5	348	83	7.5	9.2	M12	M8x40	20	17.5		8	40	9	6
JY.321200	126	144	102	102	80.3	38	32	39	46	ø10x30	18.5	530	127	11.5	12.5	M16	M12x65	25	27		14	60	20	10
JY.501600	174	200	140	140	113.5	53	50	55	64	ø12x40	25	530	174	15.5	17	M24	M16x80	35	40		20	80	40	14

INSTALLATION GUIDELINES


ES Consejos de Instalación DE Richtlinien zur Installation
IT Consigli di Installazione PT Instruções de Instalação FR Mode d'Installation

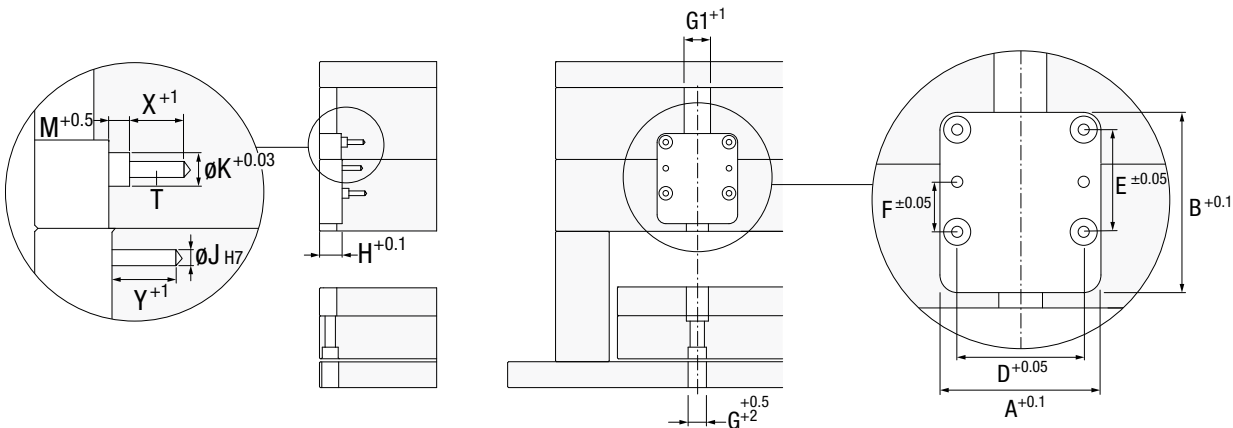

TRAILING DOUBLE EJECTION

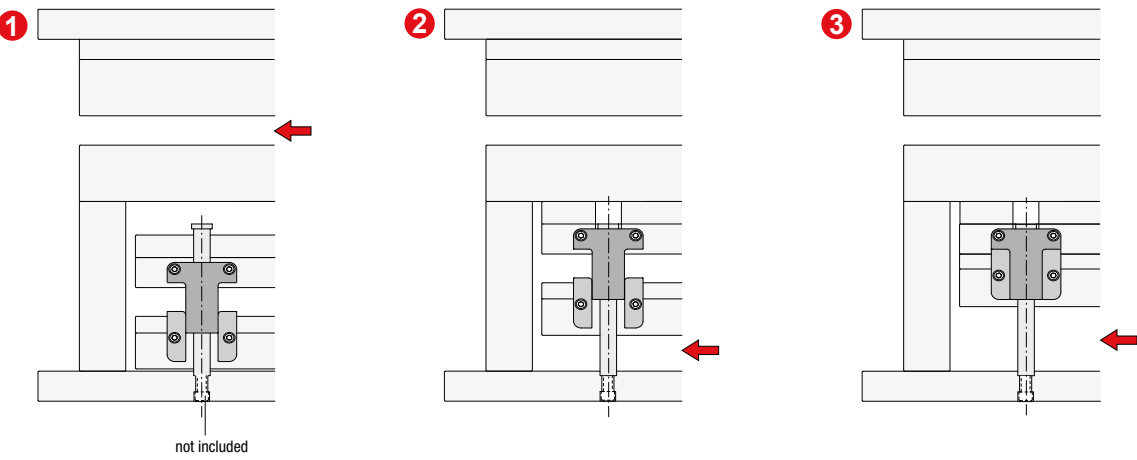

FLOATING STRIPPER PLATE

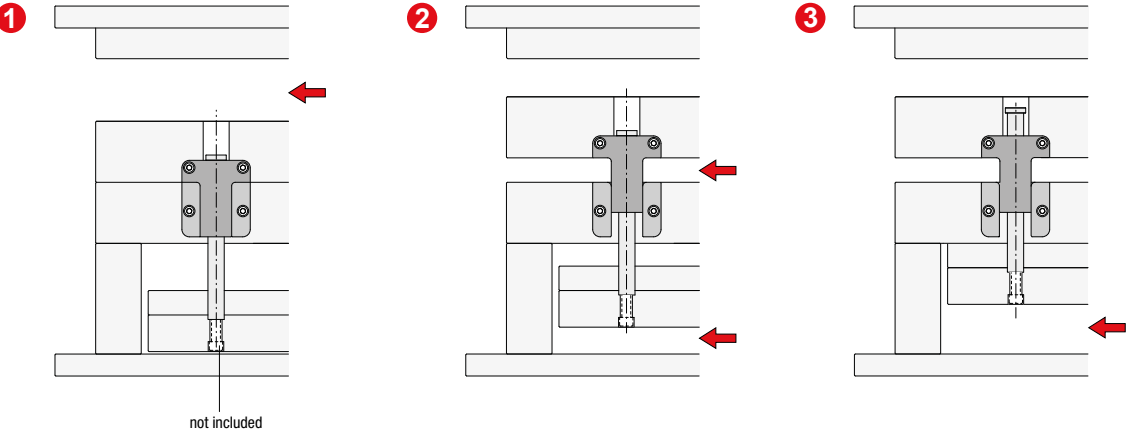

JY

EJECTION



Max.
150°C

