


MINI GUIDE

ES Mini Guía DE Mini Schieberführung
IT Mini Colonna PT Mini Guia FR Mini Guide

MG

Patented

Max.
110°C

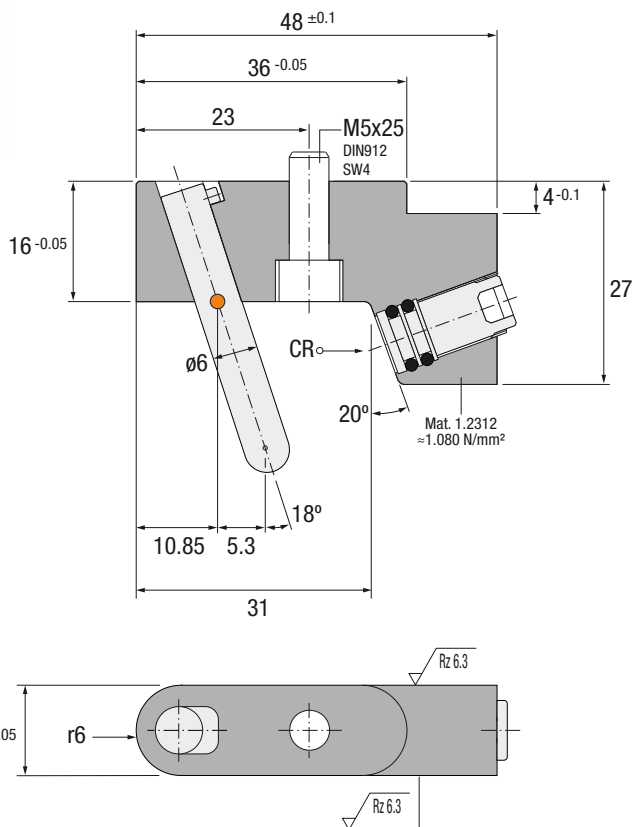

● Cad Insertion Point

Ref.	A	CR (N)
MG.121648	12	50.000
MG.201648	20	90.000


IMPORTANT !

Standard stroke of 4mm.
Recorrido estándar de 4mm.
Standard Hub 4mm.
Corsa carrello 4mm.
Curso standard de 4mm.
Course standard de 4mm.

MC

Patented

Max.
150°C

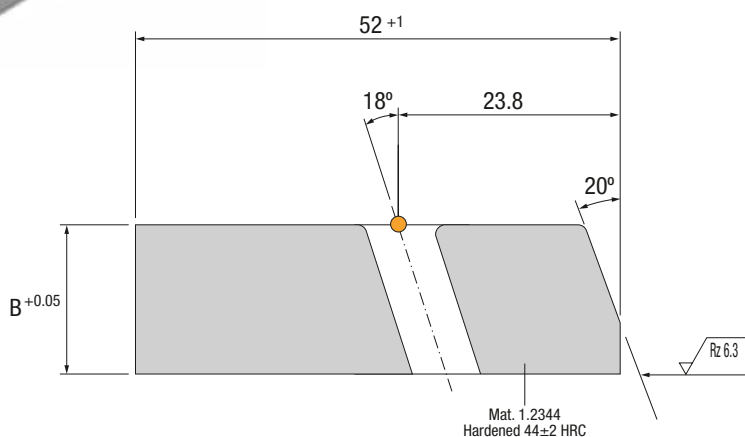


● Cad Insertion Point

Ref.	A	B
MC.121252	12.5	12
MC.121652	12.5	16
MC.201252	20.5	12
MC.201652	20.5	16

MINI SLIDE

ES Mini Corredera DE Mini Schieber
IT Mini Carrello PT Mini Corrediça FR Mini Coulisseau

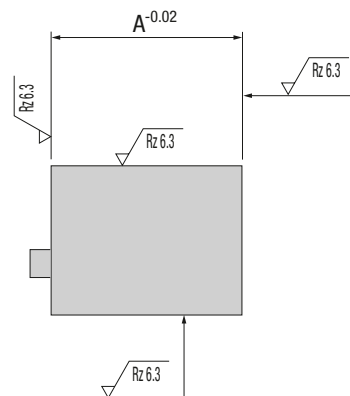

IMPORTANT !

