


# MR

SLIDES



Patented

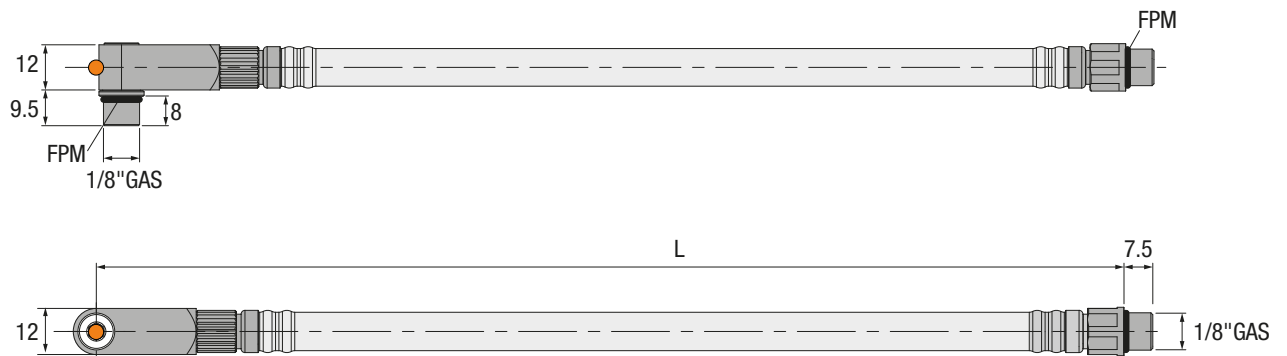

| Ref.      | L    | Material/Color | Max. Temp. | Max. Pressure |
|-----------|------|----------------|------------|---------------|
| MR.180500 | 500  | PU / Black     | 70°C       | View table    |
| MR.181000 | 1000 | PU / Black     | 70°C       | View table    |
| MR.180505 | 500  | PTFE / White   | 260°C      | View table    |
| MR.181010 | 1000 | PTFE / White   | 260°C      | View table    |


| Temp.        | Max. Pressure |
|--------------|---------------|
| -20° to 20°C | 9             |
| 30°C         | 8             |
| 40°C         | 7             |
| 50°C         | 6             |
| 70°C         | 5             |

| Temp. | Max. Pressure |
|-------|---------------|
| 20°   | 18            |
| 60°C  | 16.2          |
| 100°C | 14.5          |
| 140°C | 10.8          |
| 180°C | 4.5           |
| 220°C | 3             |
| 260°C | 1.3           |

## Installation Guidelines

Consejos de Instalación · Richtlinien zur Installation · Consigli di Installazione · Instruções de Instalação · Mode d'Installation

### Cavity Installation

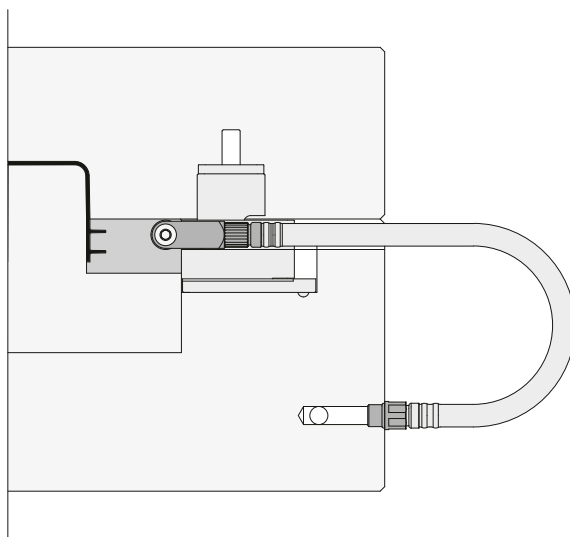

### Core Installation

