


SD

UNDERCUT BASE UNIT

ES Soporte Deslizamiento DE Schrägäuswerfer Basisführung
IT Supporto di Scorrimento PT Suporte Deslize FR Douille de Guidage

● Cad Insertion Point

Max.
150°C

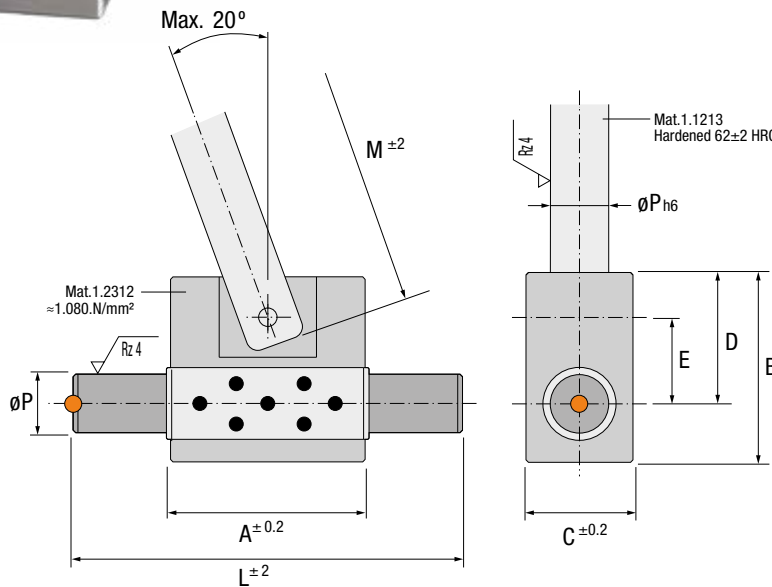

Ref.	A	B	C	D	E	L	M	P
SD.3220GR	32	37	20	27	18	80	180	10
SD.3824GR	38	40	24	28	19	80	210	12
SD.4528GR	45	44	28	30	21	100	250	16

IMPORTANT !

Longer **M** available as special.
Posibilidad de varilla (cota **M**) más larga.
Längere **M**-Maße als Sonderfertigung verfügbar.
Possibilità di avere **M** speciale di lunghezza maggiore.
Cota **M** de maiores dimensões por encomenda.
Possibilité de tige plus longue (cote **M**).

IMPORTANT !

The unit and the rod are delivered separately.
El cuerpo y la varilla se entregan separados.
Die Schubstange ist nicht montiert.
Il gruppo e l'asta si consegnano separatamente.
O corpo e a haste são fornecidos em separado.
Le corps et la tige sont livrés démontés.



CI

ANGLED GUIDE BUSH

ES Casquillo Inclinado DE Schrägbuchse
IT Bussola Inclinata PT Casquilho Inclinado FR Cale Escamotable

● Cad Insertion Point

Max.
150°C

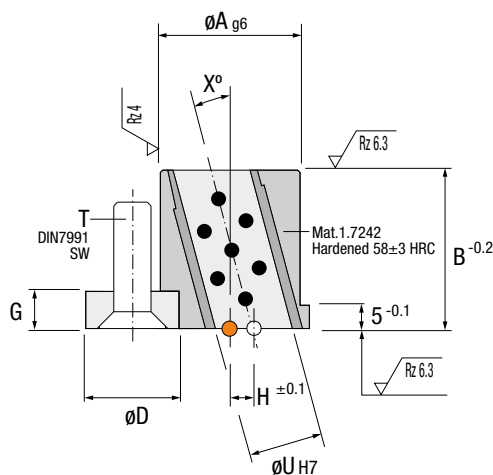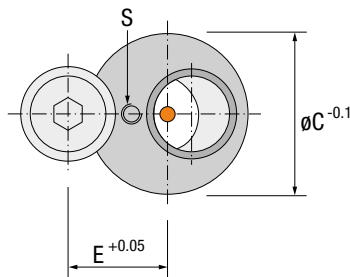

Ref.	A	B	C	D	E	G	H	S	T	U	X	SW
CI.3034GR-5	30	34	34	16	20	6	0	M4x6	M6x16	10	5	4
CI.3438GR-5	34	38	38	20	24	8	0	M6x6	M8x20	12	5	5
CI.4040GR-5	40	40	44	20	27	8	0	M6x6	M8x20	16	5	5
CI.3034GR-10	30	34	34	16	20	6	7	M6x6	M6x16	10	10	-
CI.3438GR-10	34	38	38	20	24	8	8.5	M8x6	M8x20	12	10	-
CI.4040GR-10	40	40	44	20	27	8	8.5	M8x6	M8x20	16	10	-
CI.3034GR-15	30	34	34	16	20	6	7	M6x6	M6x16	10	15	-
CI.3438GR-15	34	38	38	20	24	8	8.5	M8x6	M8x20	12	15	-
CI.4040GR-15	40	40	44	20	27	8	8.5	M8x6	M8x20	16	15	-
CI.3034GR-20	30	34	34	16	20	6	7	M6x6	M6x16	10	20	-
CI.3438GR-20	34	38	38	20	24	8	8.5	M8x6	M8x20	12	20	-
CI.4040GR-20	40	40	44	20	27	8	8.5	M8x6	M8x20	16	20	-

Installation Guidelines

Consejos de Instalación · Richtlinien zur Installation · Consigli di Installazione
Instruções de Instalação · Mode d'Installation

