

KR


COOLED RACK LIFTER

ES Doble Cremallera Refrigerada DE Gekühltes Zweifach Zahnstangen System
IT Doppia Cremagliera con Refrigerazione PT Duplo Rack Refrigerado FR Double Rack Réfrigéré

● Cad Insertion Point


Patented

Max.
80°C

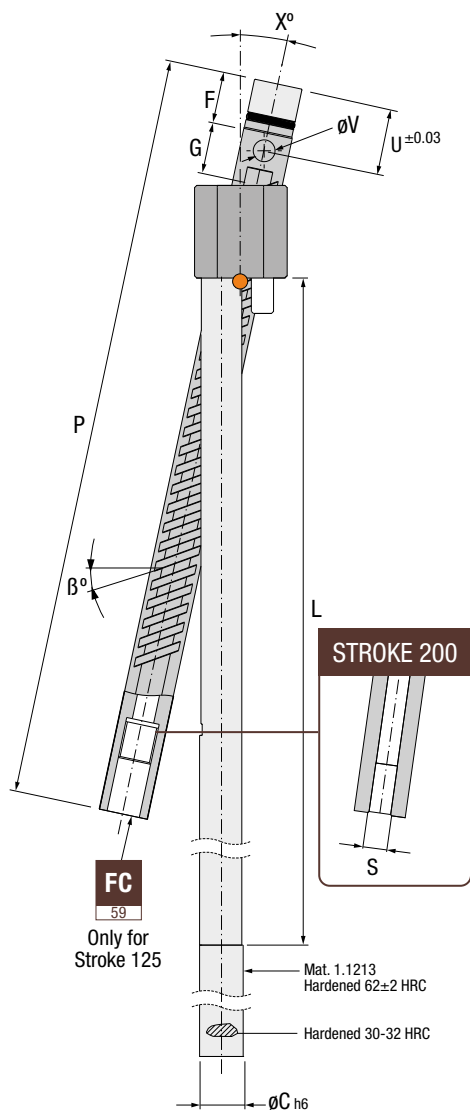

FC
59
Only for
Stroke 125

STROKE 200

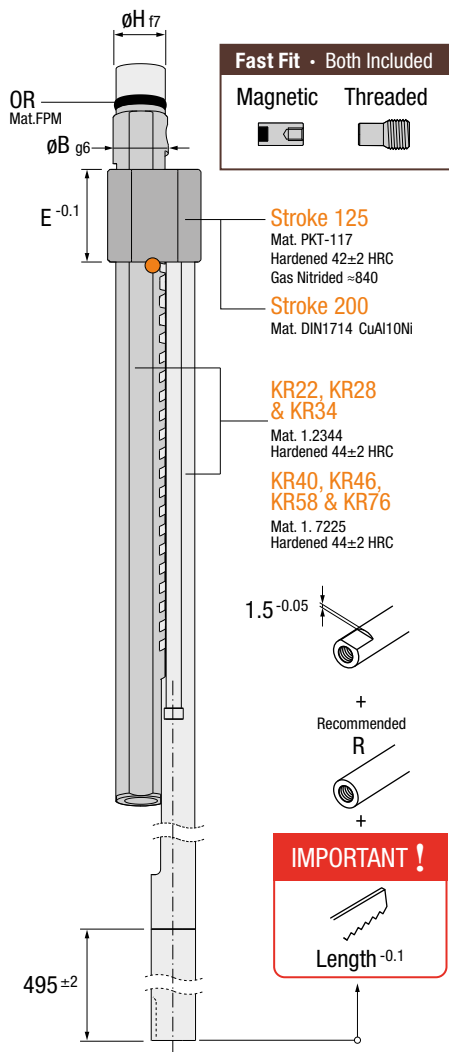

Fast Fit - Both Included

Magnetic Threaded

Stroke 125

Mat. PKT-117
Hardened 42±2 HRC
Gas Nitrided ≈840

Stroke 200

Mat. DIN1714 CuAl10Ni

**KR22, KR28
& KR34**


Mat. 1.2344
Hardened 44±2 HRC

**KR40, KR46,
KR58 & KR76**

Mat. 1.7225
Hardened 44±2 HRC

IMPORTANT !

Length - 0.1



COOLING CONNECTION OPTIONS

Only for Stroke 125

Option A

Option B

IMPORTANT !

IMPORTANT !

Mirror part.
Pieza simétrica.
Symmetrisches Teil.
Versione a specchio.
Peça em espelho.
Pièce en miroir.

Ref.	X°	A	B	C	E	F	G	H	L	P	Q	R	S	Stroke	T	U	V	OR	Mirror Ref. -S	SW
KR.22125L-x	8 12 16	20	22	12	22	16	20	10.8	282	260	6.5	M6	-	125	M6	23	8	8x1.25	KR.22125L-x-S	4
KR.28125L-x	8 12 16	20	28	16	28	16	20	13.8	294.5	272	8.5	M8	-	125	M8	23	8	11x1.3	KR.28125L-x-S	5
KR.34125L-x	8 12 16	20	34	20	34	18	20	17.8	311.5	275	10.5	M8	-	125	M8	25	8	14x1.78	KR.34125L-x-S	5
KR.40125L-x	8 12 16	20	40	22	40	20	25	19.8	342	350	10.5	M10	-	125	M10	28	10	16x2	KR.40125L-x-S	6
KR.46125L-x	8 12 16	20	46	24	46	22	25	21.8	361	350	10.5	M12	-	125	M12	30	10	18x2	KR.46125L-x-S	8
KR.58200L-x	8 12 16	-	58	30	66	25	55	26	362	430	13.5	M20	1/4"Gas	200	M14	60	12	21x2.5	KR.58200L-x-S	12
KR.76200L-x	8 12 16	-	76	40	80	30	60	34	392	470	17	M24	3/8"Gas	200	M18	70	12	28x3	KR.76200L-x-S	14

HOW TO ORDER

Check page 50-51 for Min / Max β values

$\beta^\circ < 0$ & $\beta^\circ = 0$

$\beta^\circ > 0$

KR 28 125L - 12 -10 — Standard — KR 28 125L - 12 +10

KR 28 125L - 12 -S -10 — Symmetrical — KR 28 125L - 12 -S +10



INSTALLATION GUIDELINES

ES Consejos de Instalación DE Richtlinien zur Installation
IT Consigli di Installazione PT Instruções de Instalação FR Mode d'Installation

