

DOUBLE ACTION VACUUMJET

ES Unidad de Vacío de Doble Acción DE Double Action Vacuumjetsystem
IT Vacuumjet Doppia Azione PT Vacuumjet Duplo Efeito FR Vacuumjet Double Effet

● Cad Insertion Point


VB

VACUUM



Patented



Max. 80°C

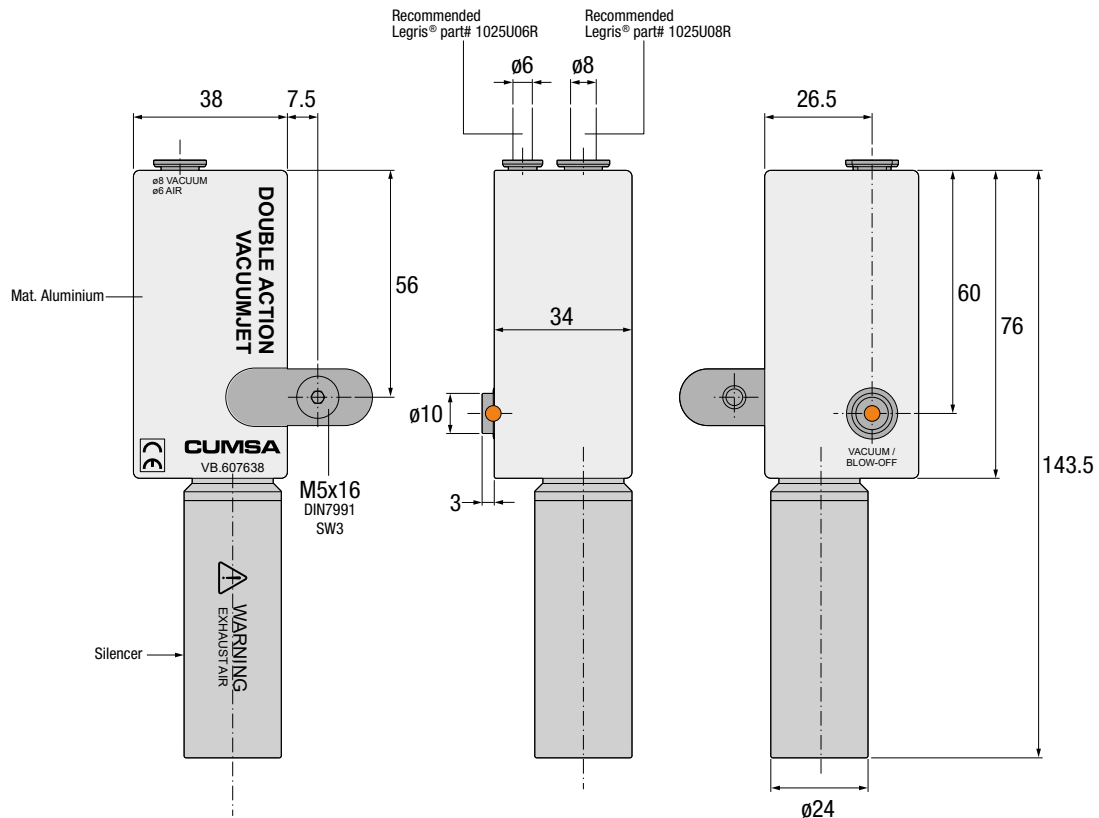

Ref.	Supply Pressure	Max. Vacuum	Max. Flow	Consumption	Max. Blow-off Outlet Pressure
VB.607638	5-6 BAR	-900 mbar	75 L./ Min.	60 L./ Min.	3 BAR

Installation Guidelines

Consejos de Instalación · Richtlinien zur Installation · Consigli di Installazione · Instruções de Instalação · Mode d'Installation

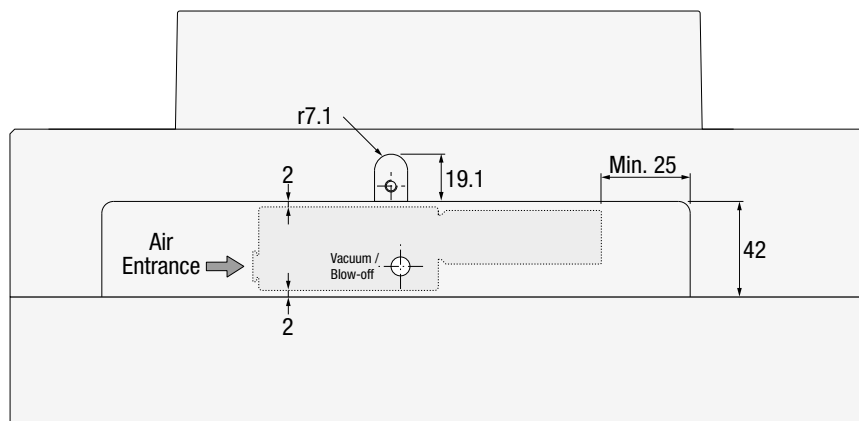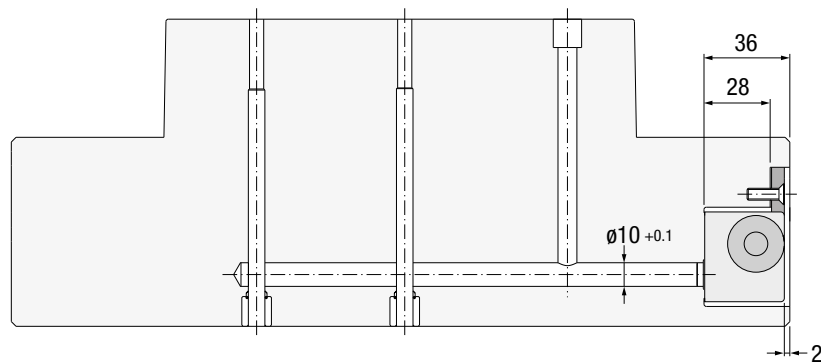

INSTALLATION GUIDELINES

ES Consejos de Instalación DE Richtlinien zur Installation
IT Consigli di Installazione PT Instruções de Instalação FR Mode d'Installation



VB

VACUUM




Patented



Vacuum

Blow-off

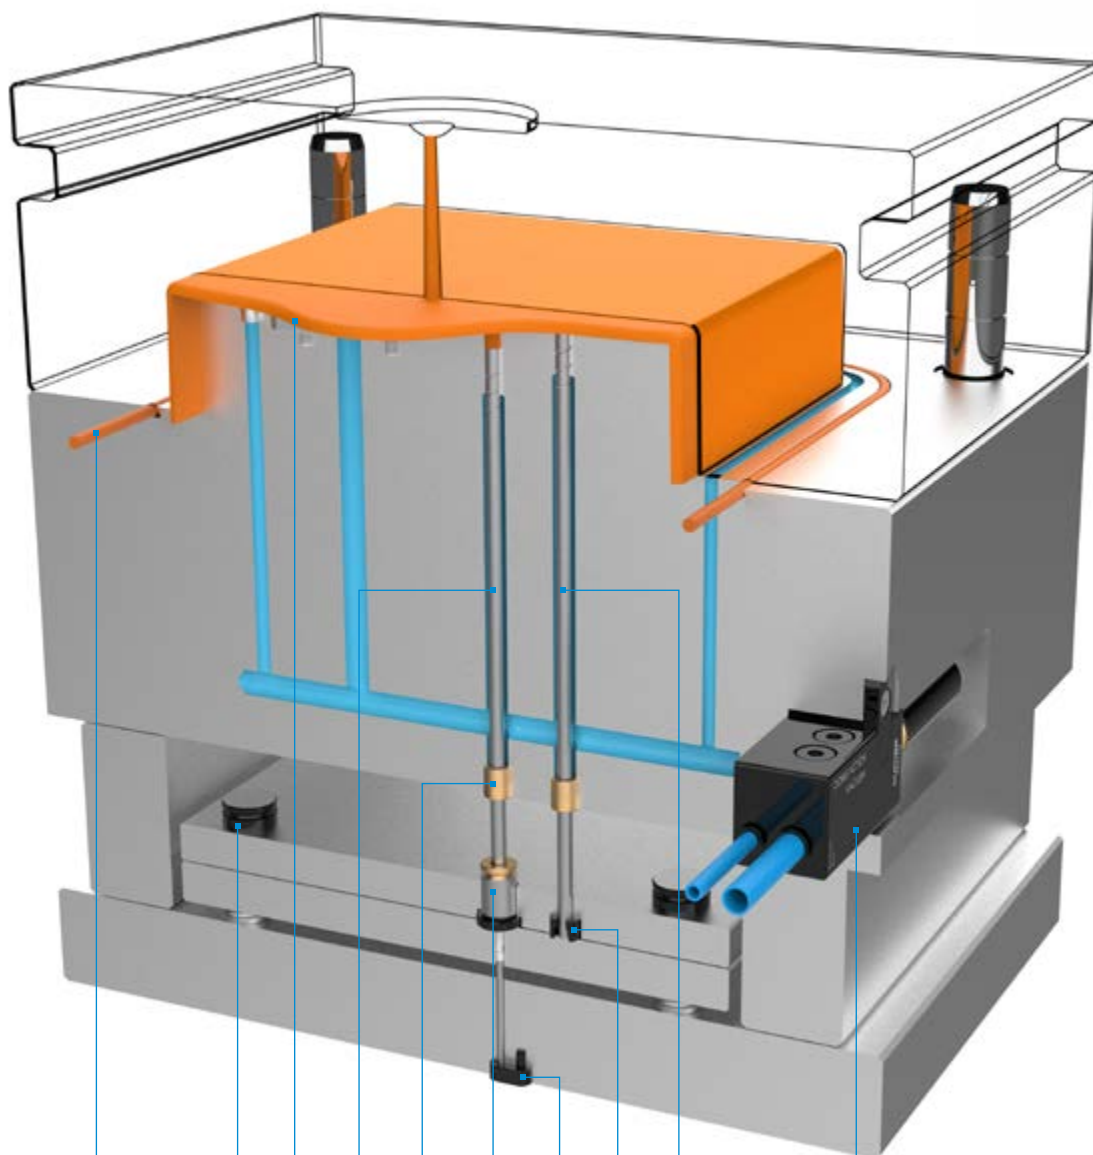

JV
148

TM
104

LV
147

VS
145

CV
146

BT
102

NP
144

NR
145

VP
132

VB
130

