

DOUBLE ACTION VACUUMJET


ES Unidad de Vacío de Doble Acción DE Double Action Vacuumjetsystem
IT Vacuumjet Doppia Azione PT Vacuumjet Duplo Efeito FR Vacuumjet Double Effet

● Cad Insertion Point

VB

Patented



Max.
80°C

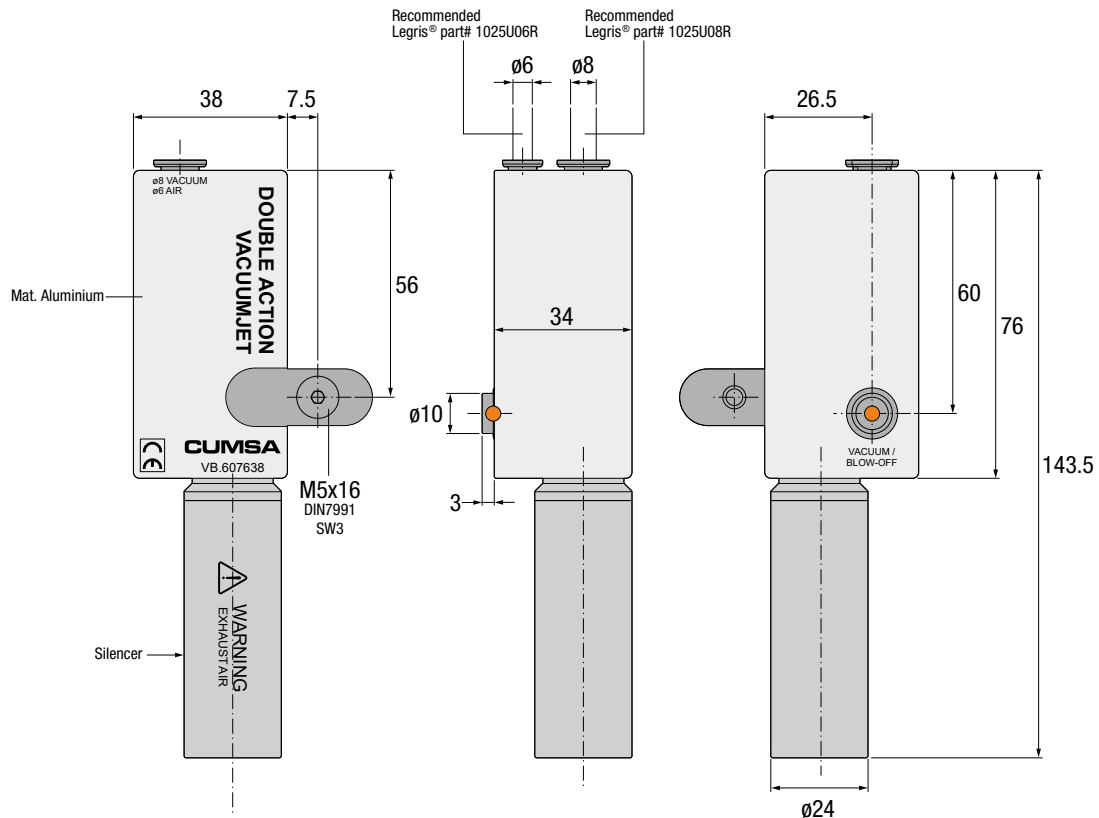

Ref.	Supply Pressure	Max. Vacuum	Max. Flow	Consumption	Max. Blow-off Outlet Pressure
VB.607638	5-6 BAR	-900 mbar	75 L./ Min.	60 L./ Min.	3 BAR

Installation Guidelines

Consejos de Instalación · Richtlinien zur Installation · Consigli di Installazione · Instruções de Instalação · Mode d'Installation

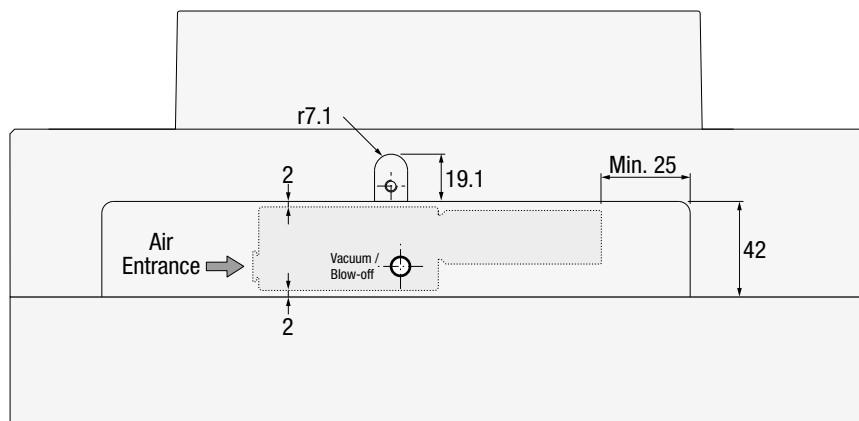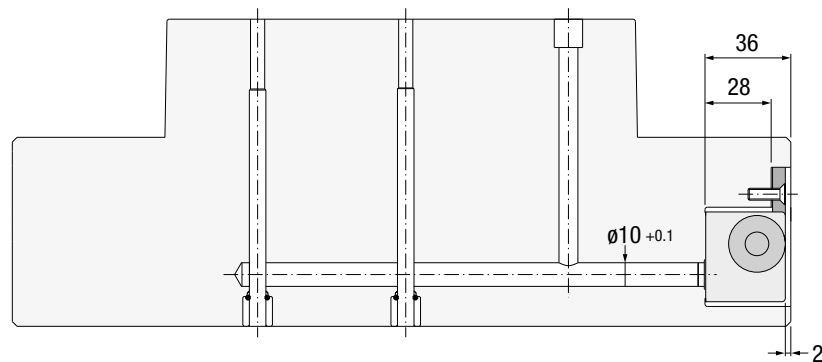


INSTALLATION GUIDELINES

ES Consejos de Instalación DE Richtlinien zur Installation
IT Consigli di Installazione PT Instruções de Instalação FR Mode d'Installation



VB

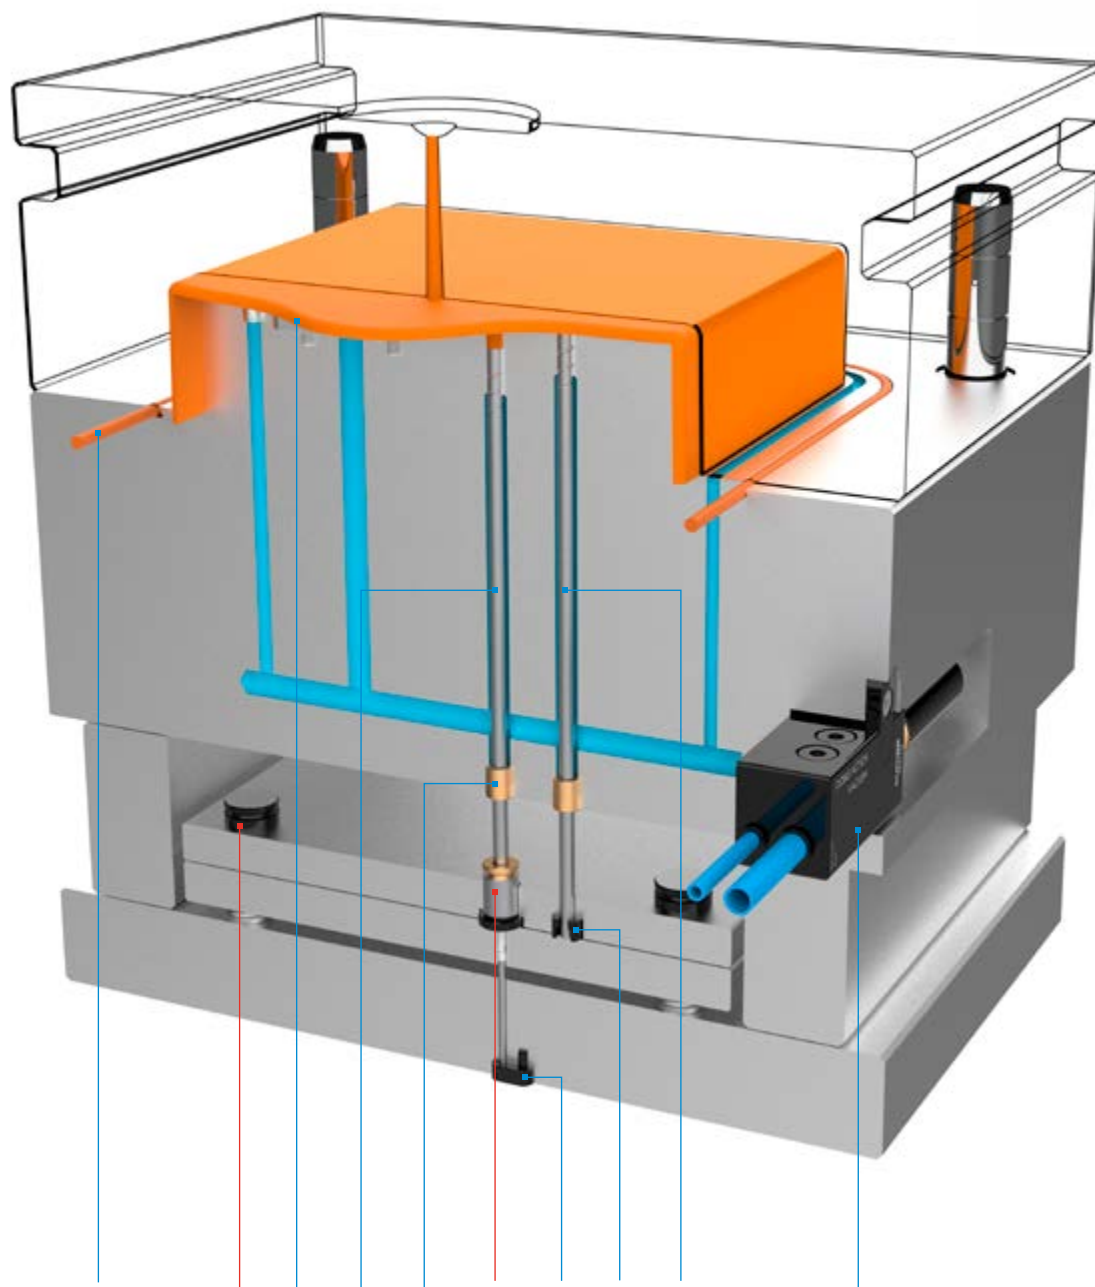

Patented

Max.
80°C

Vacuum

Blow-off

