

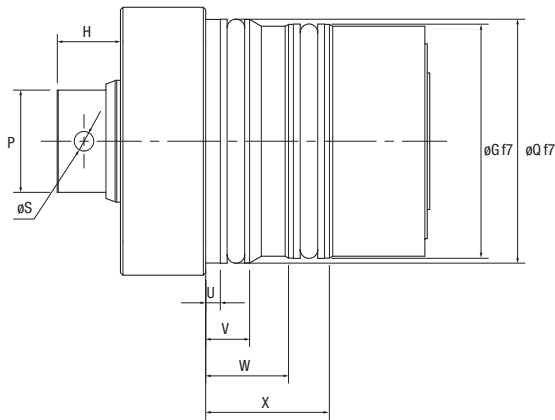
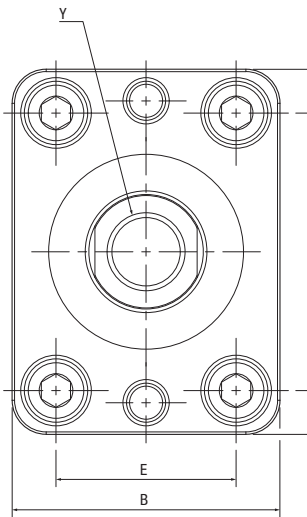
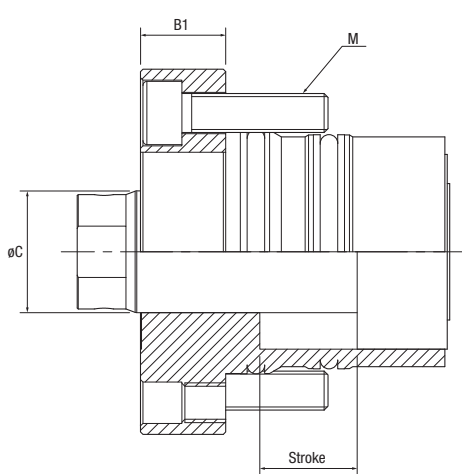


Max.
250 bar
(3600PSI)

Max.
180°C
(356°F)

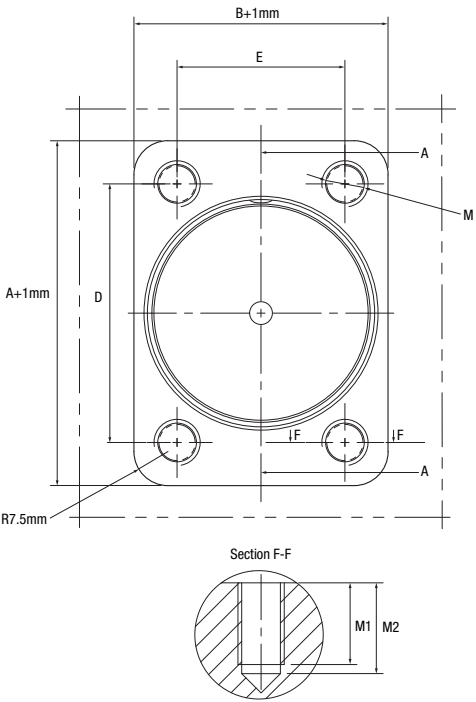

Can be ordered in multiples of 10mm, between Min. and Max. values.
Para versiones neumáticas sobre consulta.
Kann in mehreren 10mm Varianten bestellt werden, zwischen min. und max.
Puo' essere ordinata in multipli di 10mm., tra i valori Min. E Max.
Disponível em múltiplos de 10mm, entre os valores Min. e Max.
Disponible en multiple de 10mm, entre les valeurs mini et maxi.

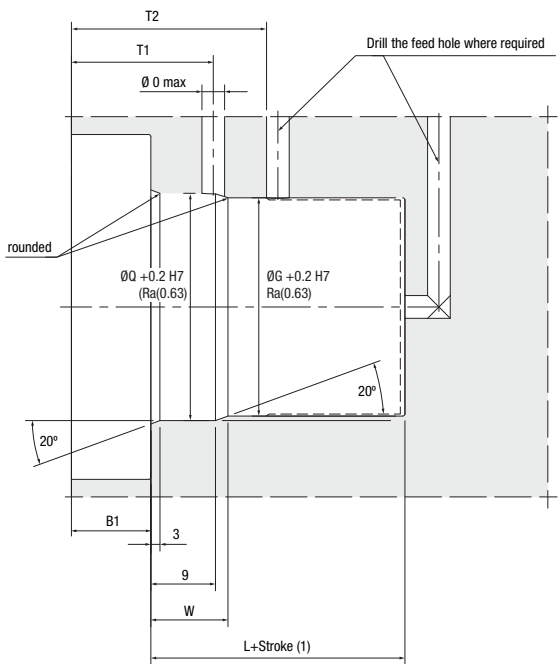

3D Insertion Reference

HOW TO ORDER / FORMATO DE PEDIDO / WIE MAN BESTELLT / COME ORDINARE/COMO ENCOMENDAR /COMMENT COMMANDER

mm

F	O	AU	40	-	15	Reference: F0AU40-15																									
TYPE	OPERATION MODE 	FIXING STYLE	PISTON Ø	STROKE ±0.1 (1)		A	B	B1	C	D	E	G			H ±0.5	L	M	M1	M2	Ø 0 Max	P	Q	S	T1	T2 Min	U	V	W	X	Y	
				MIN.	MAX.																										
F	O	AU	016	10	50	55	35	11	10	36	22	25			8	21.2	M6x16	13	16	4.5	8	26	3	19.5	34	2	6	14	23.4	M6x12	NEW
			025	010	050	55	40	13,5	16	42	27	34.1			10	23.5	M5x20	12	15	6	13	35.4	3	13.5	28	3	9	16	24.4	M10x15	
			032	010	065	65	47	13,5	20	50	32	40.5			12	24.5	M6x26	13	16	7	17	42.1	4	13.5	29	3	9	17	25.4	M12x15	
			040	010	080	75	55	17,5	25	57	37	48.1			13	26	M8x30	16	19	8	21	50.1	4	13.5	29	3	9	17	25.4	M16x25	
			050	010	080	89	69	21,5	32	69	49	57.7			14	30.5	M10x35	19	21	10	26	59.7	5	15	32	3	9	19	27.4	M20x30	
			063	010	080	106	86	25,5	40	84	64	73.6			18	34	M12x45	19	21	10	32	75.1	5	16	32	3	9	19	27.4	M24x35	

Can be ordered in multiples of 10mm, between Min. and Max. values.
Se puede pedir en múltiplos de 10mm., entre los valores Min. y Max.
Kann in mehreren 10mm Varianten bestellt werden, zwischen min. und max.
Puo' essere ordinata in multipli di 10mm., tra i valori Min. E Max.
Disponível em múltiplos de 10mm, entre os valores Min. e Max.
Disponible en multiple de 10mm, entre les valeurs mini et maxi.