


SD

UNDERCUT BASE UNIT

ES Soporte Deslizamiento DE Schrägäuswerfer Basisführung
IT Supporto di Scorrimento PT Suporte Deslize FR Douille de Guidage

● Cad Insertion Point

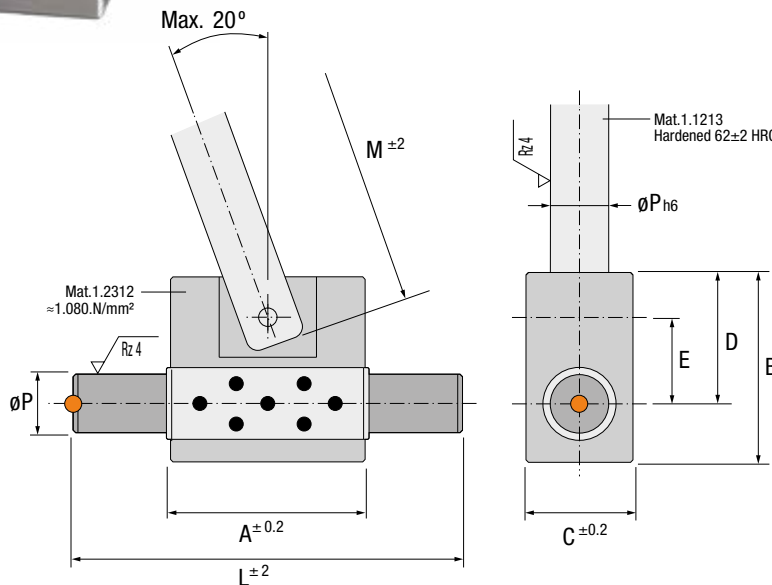

Ref.	A	B	C	D	E	L	M	P
SD.3220GR	32	37	20	27	18	80	180	10
SD.3824GR	38	40	24	28	19	80	210	12
SD.4528GR	45	44	28	30	21	100	250	16

! IMPORTANT !

Longer **M** available as special.
Posibilidad de varilla (cota **M**) más larga.
Längere **M**-Maße als Sonderfertigung verfügbar.
Possibilità di avere **M** speciale di lunghezza maggiore.
Cota **M** de maiores dimensões por encomenda.
Possibilit  de tige plus longue (cote **M**).

! IMPORTANT !

The unit and the rod are delivered separately.
El cuerpo y la varilla se entregan separados.
Die Schubstange ist nicht montiert.
Il gruppo e l'asta si consegnano separatamente.
O corpo e a haste s o fornecidos em separado.
Le corps et la tige sont livr s d mont s.

Max. 150°C




CI

ANGLED GUIDE BUSH

ES Casquillo Inclinado DE Schrägbuchse
IT Bussola Inclinata PT Casquilho Inclinado FR Cale Escamotable

● Cad Insertion Point

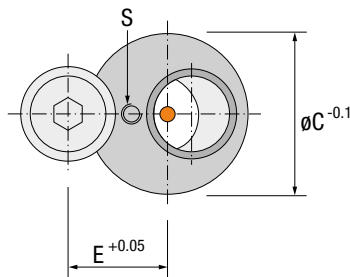

Ref.	A	B	C	D	E	G	H	S	T	U	X	SW
CI.3034GR-5	30	34	34	16	20	6	0	M4x6	M6x16	10	5	4
CI.3438GR-5	34	38	38	20	24	8	0	M6x6	M8x20	12	5	5
CI.4040GR-5	40	40	44	20	27	8	0	M6x6	M8x20	16	5	5
CI.3034GR-10	30	34	34	16	20	6	7	M6x6	M6x16	10	10	-
CI.3438GR-10	34	38	38	20	24	8	8.5	M8x6	M8x20	12	10	-
CI.4040GR-10	40	40	44	20	27	8	8.5	M8x6	M8x20	16	10	-
CI.3034GR-15	30	34	34	16	20	6	7	M6x6	M6x16	10	15	-
CI.3438GR-15	34	38	38	20	24	8	8.5	M8x6	M8x20	12	15	-
CI.4040GR-15	40	40	44	20	27	8	8.5	M8x6	M8x20	16	15	-
CI.3034GR-20	30	34	34	16	20	6	7	M6x6	M6x16	10	20	-
CI.3438GR-20	34	38	38	20	24	8	8.5	M8x6	M8x20	12	20	-
CI.4040GR-20	40	40	44	20	27	8	8.5	M8x6	M8x20	16	20	-


Max. 150°C



Installation Guidelines

Consejos de Instalaci n · Richtlinien zur Installation · Consigli di Installazione
Instru  es de Instala    · Mode d'Installation

1 Mold Closed

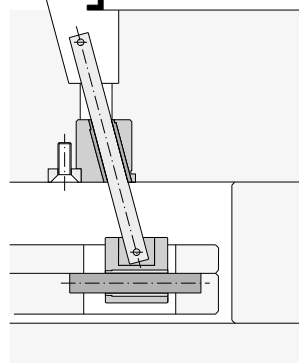

2 Mold Open

