


# MULTIPLE SOLUTIONS FOR YOUR PLATE MOVEMENTS


## THREE PLATE MOLD:

Products designed to make a pre-opening movement in the mold cavity, before opening the mold to eject the part.

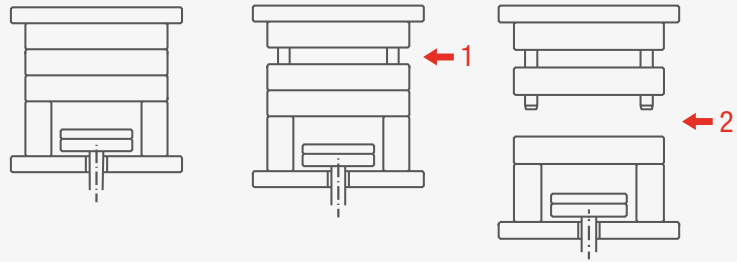


## LEADING DOUBLE EJECTION:

Double ejection system to control 2 sets of ejector plates when the injection machine actuates the upper set of ejector plates.

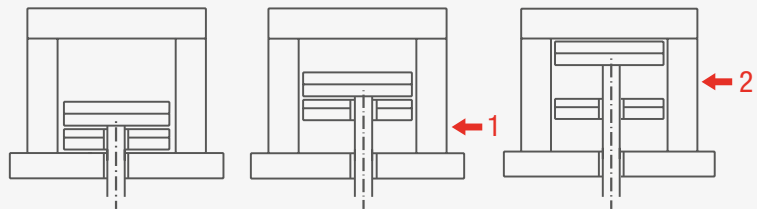


## TRAILING DOUBLE EJECTION:

Double ejection system to control 2 sets of ejector plates when the injection machine actuates the lower set of ejector plates.

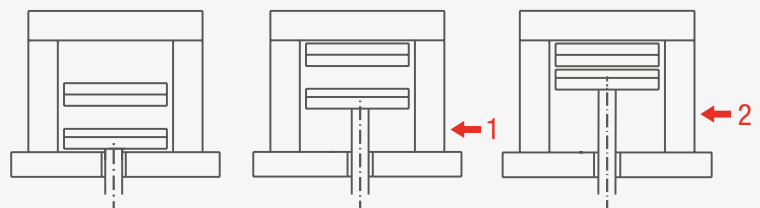

## SYNCHRONIZED PLATES:

Designed to allow synchronized mold plates openings, regardless of their location. With a customizable first stroke opening, and a free second movement.


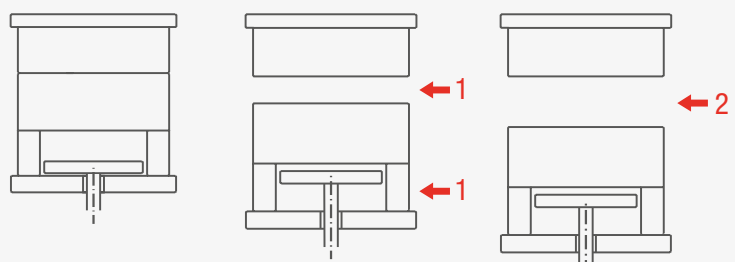


# REAR DOUBLE EJECTOR

ES Doble Expulsión Inferior DE Zweistufenauswerfer DY  
 IT Doppia Espulsione Inferiore PT Dupla extracção inferior FR Double Ejection inférieure

● Cad Insertion Point



# DY

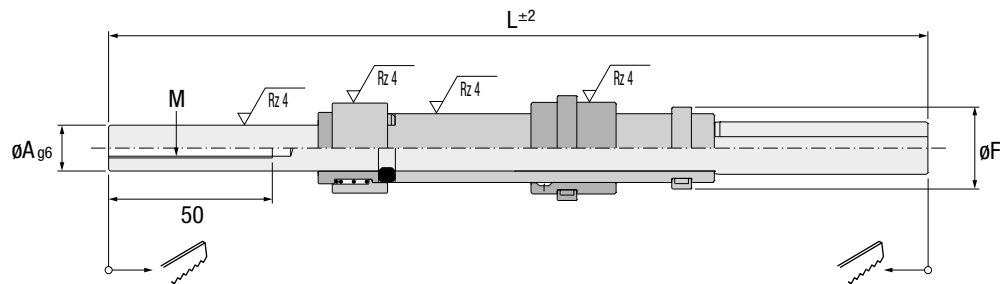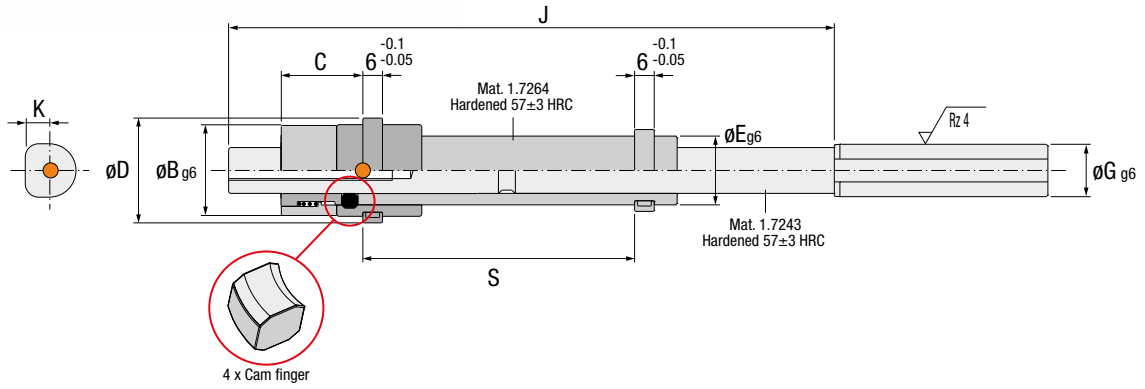

Ref.	A	B	C	D	E	F	G	J	K	L	M	L1	L2	S
DY.142825	14	28	25	32	21	25	16	185	7.2	270	M6	48	49	83
DY.163230	16	32	30	36	24	28	18	252	8	337	M8	60	89	123

## Installation Guidelines

Consejos de Instalación · Richtlinien zur Installation · Consigli di Installazione · Instruções de Instalação · Mode d'Installation

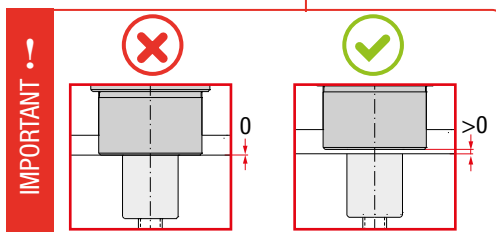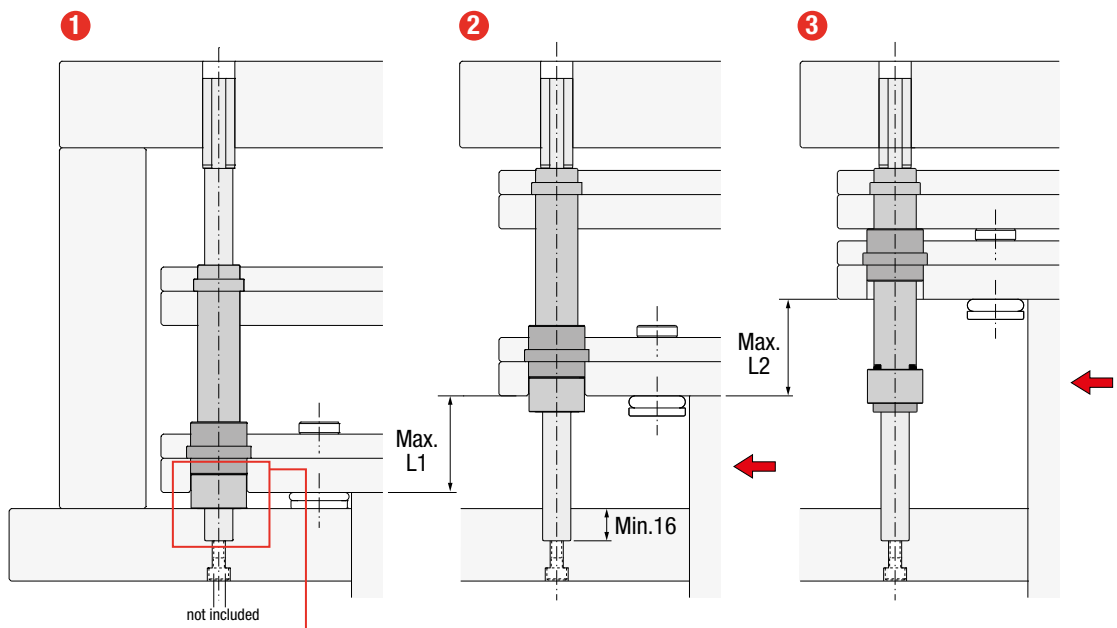

Patented

Max. 150°C