


HEEL UNIT

ES Cuña Guía DE Einstellbare Zuhaltung
 IT Contrasto Colonna PT Guia Cunha FR Base de Verrouillage



CG

● Cad Insertion Point

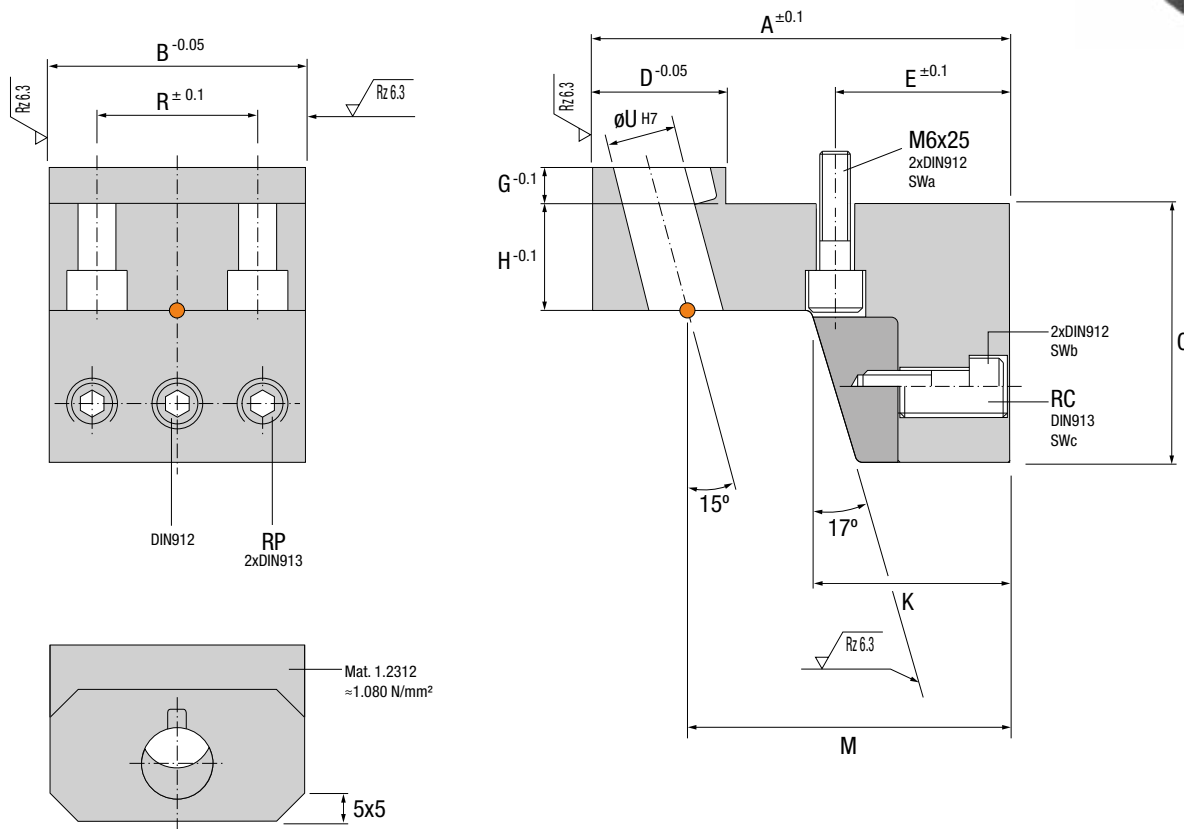

Patented
 Max. 150°C

Ref.	A	B	C	D	E	G	H	K	M	R	T	U	RP	CR (N)	SWa	SWb	SWc
CG.603035	60	30	35	25	23	6	17	29	43.7	17	M6x25	10	081015	180.000	5	3	4
CG.604035	60	40	35	25	23	6	17	29	43.7	22	M6x25	10	101015	320.000	5	4	5
CG.754049	75	40	49	30	32	7	20	39	58	22	M8x30	12	101020	320.000	6	5	5
CG.864857	86	48	57	35	36	8	24	44	65	28	M8x35	16	121025	480.000	6	6	6

Installation Guidelines

Consejos de Instalación · Richtlinien zur Installation · Consigli di Installazione · Instruções de Instalação · Mode d'Installation

Mold Closed

