

CR COOLING HOSE


ES Refrigeración CR DE Kühlungsschlauch für CR
IT Refrigerazione CR PT Refrigeração CR FR Refroidissement CR

● Cad Insertion Point

MR

SLIDES

Patented

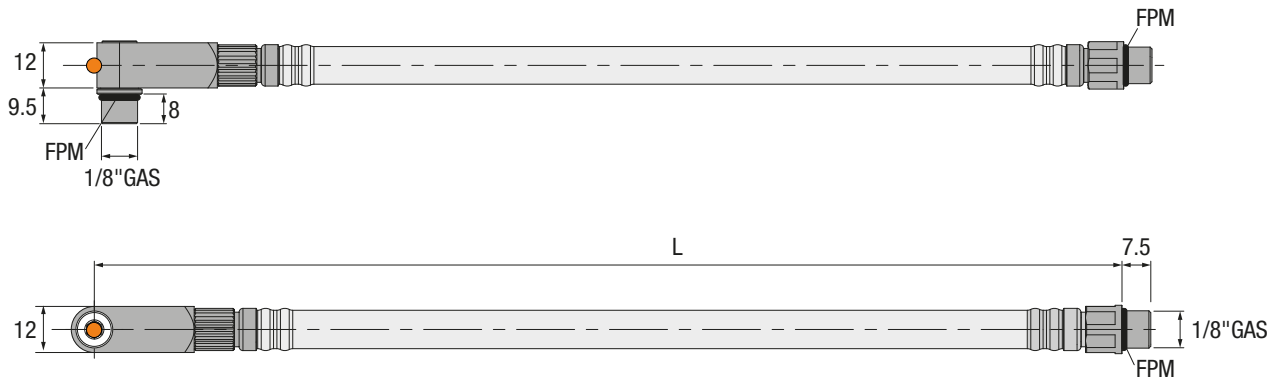

Ref.	L	Material/Color	Max. Temp.	Max. Pressure
MR.180500	500	PU / Black	70°C	View table
MR.181000	1000	PU / Black	70°C	View table
MR.180505	500	PTFE / White	260°C	View table
MR.181010	1000	PTFE / White	260°C	View table


Temp.	Max. Pressure
-20° to 20°C	9
30°C	8
40°C	7
50°C	6
70°C	5

Temp.	Max. Pressure
20°	18
60°C	16.2
100°C	14.5
140°C	10.8
180°C	4.5
220°C	3
260°C	1.3

Installation Guidelines

Consejos de Instalación · Richtlinien zur Installation · Consigli di Installazione · Instruções de Instalação · Mode d'Installation

Cavity Installation

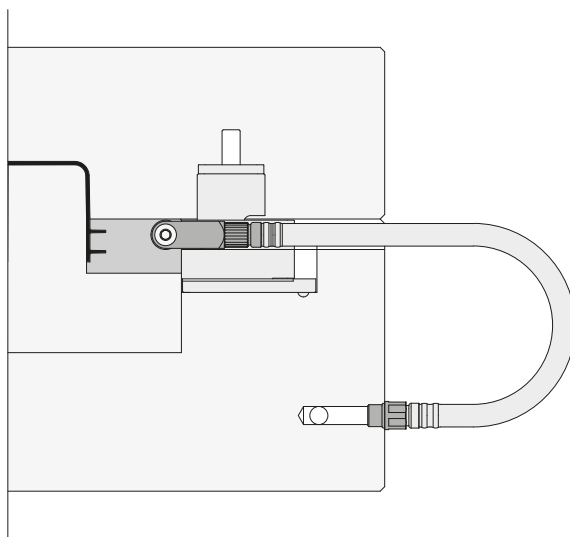

Core Installation

