


KR COOLING HOSE

ES Tubo Refrigeración KR DE KR Kühlungsschlauch

IT Sistema Refrigerazione KR PT Tubo de Refrigeração KR FR Tube de Refroidissement KR

● Cad Insertion Point

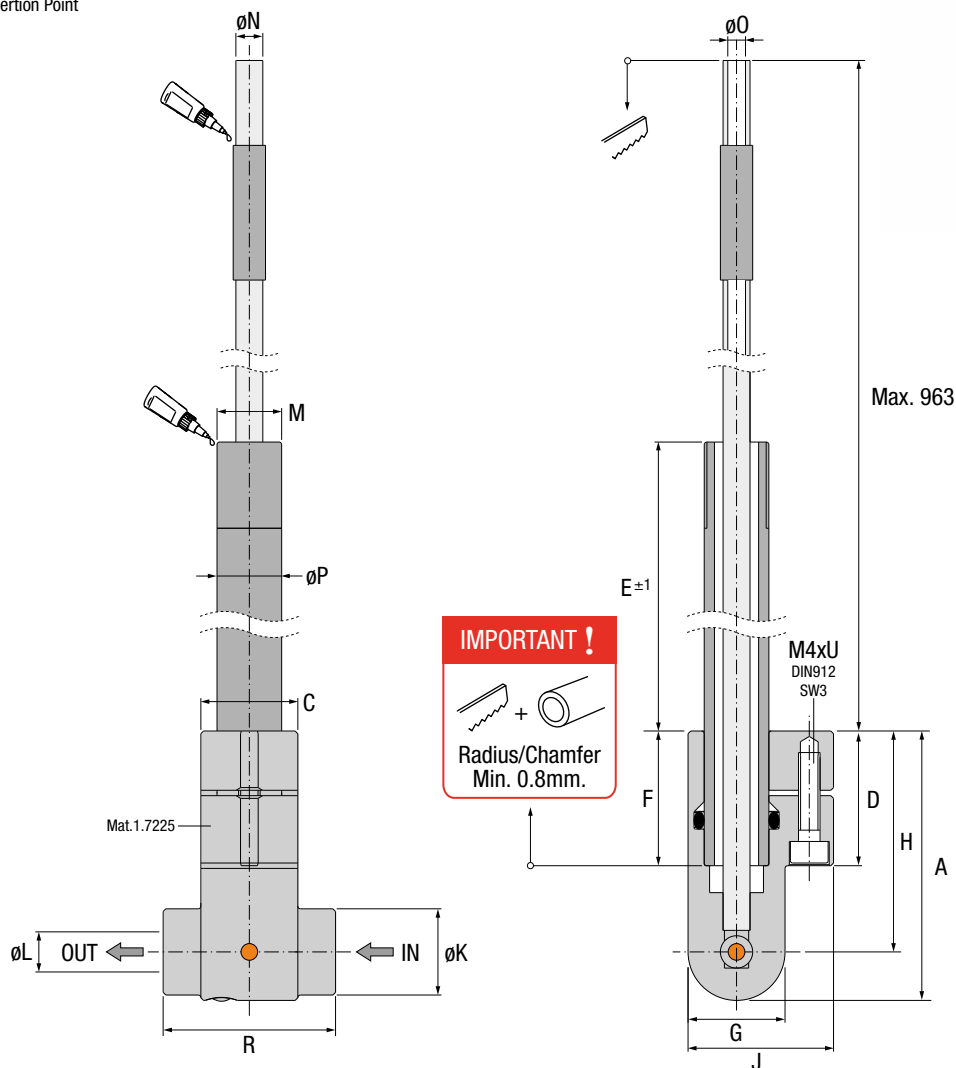

FC

UNDERCUTS




Max. 80°C


| Ref. | A | C | D | E | F | G | H | J | K | L | M | N | O | P | R | U | Compatible With |
|-----------|----|----|----|-------|------|----|----|----|----|----------|-------|-----|-----|----|----|----|-----------------------|
| FC.220500 | 40 | 15 | 18 | 483.5 | 16.5 | 18 | 31 | 27 | 16 | 1/8" GAS | M8x1 | 3.5 | 3 | 8 | 32 | 10 | KR.22125L |
| FC.280500 | 50 | 18 | 25 | 475 | 25 | 18 | 41 | 27 | 16 | 1/8" GAS | M10x1 | 4.5 | 4 | 10 | 32 | 16 | KR.28125L |
| FC.340500 | 50 | 18 | 25 | 475 | 25 | 18 | 41 | 27 | 16 | 1/8" GAS | M12x1 | 5 | 4.5 | 12 | 32 | 16 | KR.34125L |
| FC.400500 | 54 | 20 | 25 | 475 | 25 | 20 | 44 | 30 | 18 | 1/4" GAS | M14x1 | 7 | 6.5 | 14 | 40 | 16 | KR.40125L / KR.46125L |

Installation Guidelines

Consejos de Instalación · Richtlinien zur Installation · Consigli di Installazione · Instruções de Instalação · Mode d'Installation



IMPORTANT

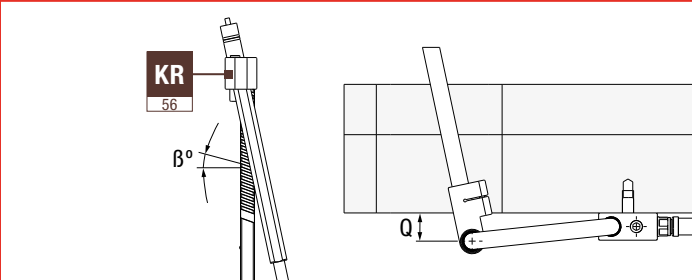

| Ref. | Q | | | | | |
|--------------|----------------------|---------------------------------|----------------------------------|----------------------------------|----------------------------------|----------------------------------|
| | $\beta \leq 0^\circ$ | $0^\circ < \beta \leq 10^\circ$ | $10^\circ < \beta \leq 20^\circ$ | $20^\circ < \beta \leq 25^\circ$ | $25^\circ < \beta \leq 30^\circ$ | $30^\circ < \beta \leq 35^\circ$ |
| KR.xx125L-8 | 10 | 15 | 18 | 20 | 23 | 25 |
| KR.xx125L-12 | 10 | 16 | 22 | 25 | 29 | - |
| KR.xx125L-16 | 10 | 18 | 26 | 31 | - | - |
| KR.xx125L-20 | 10 | 20 | 31 | - | - | - |

